



INTERCHANGEABLE LENS LCOS PROJECTORS


WUX6010 / WUX6010 D

MARKETS/APPLICATIONS
RECOMMENDED FOR:

- Education
- Corporate
- Large Conference Rooms/Auditoriums
- Houses of Worship
- Museums and Galleries
- Command Control Centers
- Digital Signage
- Simulation and Immersive Training



canon.com.au/projectors



CAPTIVATE WITH CANON COLOR AND CLARITY.

The WUX6010 Projector delivers bright, 6000 lumen high-resolution WUXGA (1920 x 1200) widescreen video and still images in a variety of environments. Equipped with Canon's LCOS Technology with AISYS-enhancement, and an advanced image processing engine, this projector displays vivid, seamless images with intricate detail, accurate color, crisp contrast, and sharp blacks. Connection options include industry standards such as HDBaseT™, HDMI and DVI.

IDEAL FOR A WIDE VARIETY OF ENVIRONMENTS



- The WUX6010 and WUX6010 D offer high brightness (6000 Lumens) and high resolution (WUXGA 1920 X 1200) to engage your audience, even in larger venue settings.



- HDBaseT™ connectivity simplifies installation and facilitates long cable runs.
- Five optional interchangeable Genuine Canon lens options to choose from to suit your needs.



KEY FEATURES

- 6000 Lumens
- WUXGA Resolution (1920 x 1200)
- LCOS Technology with AISYS-enhancement
- Optional Interchangeable Genuine Canon Lens Options
- Up to 2000:1 Contrast Ratio
- HDBaseT™
- Versatile Connectivity (HDMI, DVI)
- Motorized Horizontal/Vertical Lens Shift, Zoom, and Focus
- Network Management including Creston Connectivity & AMX Device Discovery
- DICOM® Simulation Mode* (*WUX6010 D only)

SPECIFICATIONS

PROJECTION SYSTEM

| | |
|-------------------------------|--|
| Imaging Device | 0.71" LCOS Reflective Panels x3 |
| Aspect Ratio | 16:10 |
| Native Resolution | 1920 x 1200 (WUXGA) |
| Brightness ^{*1,2} | 6000 Lumens (Normal) / 4660 Lumens (Power Saver) |
| Contrast ^{*1,3} | 2000:1 |
| Digital Keystone ¹ | V±20°, H±20° |
| Uniformity ^{*1} | 88% |

IMAGE ADJUSTMENTS

| | |
|-----------------------|---|
| Image Mode | Standard / Presentation / Dynamic / Video / Cinema / Photo / sRGB / Vivid Photo / DICOM SIM ⁶ / User 1 / User 2 / User 3 / User 4 / User 5 |
| Color Adjustment | Color Level, Color Balance, Color Temperature, Gain (R,G,B), Offset (R,G,B) |
| Wall Color Correction | Normal / Greenboard / Adjust (Custom) |
| Mounting | 360° Projection |
| Tilt Angle | Bottom Front: 2 Places (Max. Angles: 6° Elevation) |

INPUT SIGNALS

| | |
|-----------------------|--|
| Scanning Frequency | H: 27kHz – 75kHz, V: 24Hz – 60Hz |
| Analog PC Input | WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA |
| Digital PC Input | WUXGA / UXGA / WSXGA+ / SXGA+ / WXGA+ / FWXGA / WXGA / SXGA / XGA / SVGA / VGA |
| Digital Video Input | 1080p / 1080i / 720p / 576p / 480p |
| Component Video Input | 1080p / 1080i / 720p / 576p / 576i / 480p / 480i |
| Dot Clock | 162MHz |

LAMP

| | |
|---------------------|--|
| Type | 340-NSHA |
| Life ^{*5} | 3000 Hours (Full Power) / 4000 Hours (Power Saver) |
| Power ^{*3} | 340 / 264 W |

| | | |
|------------------|---------------------|------------------------|
| REALiS WUX6010 | ITEM CODE: 0867C002 | UPC CODE: 13803261844 |
| REALiS WUX6010 D | ITEM CODE: 0867C009 | UPC CODE: 660685150560 |

TERMINALS

| | |
|------------------|---|
| DVI-I | Digital PC/Analog PC Input |
| HDMI | Digital PC/Digital Video Input |
| Mini Dsub15 | Analog PC/Component Video Input |
| Mini jack x3 | Audio Input x2, Audio Output x1 |
| Mini Jack x1 | Connecting Wired Remote Controller |
| Dsub9 | RS-232C Connection |
| USB type A | USB Connection / JPEG Still Images |
| RJ-45 (HDBaseT™) | HDBaseT Connection (Image, Audio, Control and Network) |
| RJ-45 | Network Connection (1000BASE-T / 100BASE-TX / 10BASE-T) |

BUILTIN SOUND

| | |
|------------------|----------|
| Internal Speaker | 5W, Mono |
|------------------|----------|

REMOTE CONTROL

| | |
|-----------------|---|
| Wireless Remote | Infrared (Supplied) or Wired (Optional) |
|-----------------|---|


RATINGS

| | |
|---------------------------------|---|
| Fan Noise ^{*3} | 40dB (Full Power) / 36dB (Power Saver) |
| Power Consumption ^{*3} | 465W (Full Power) / 370W (Power Saver) |
| Standby Power ^{*5} | 2.0 ~ 0.3W |
| Power Voltage | AC 100 ~ 240V, 50/60 Hz |
| Operating Temperature | 32°F - 104°F (0°C - 40°C) (20% RH - 85%RH) |
| Storage Temperature | -22°F - 140°F (-30°C - 60°C) |
| Dimensions (W x H x D) | W: 14.96" (380mm), H: 6.69" (170mm), D: 16.92" (430mm) (Including Protrusion) |
| Weight | 18.73 lbs. |
| Projector Warranty | 3 Years Parts and Labor |
| Lamp Warranty | 120 Days |

DIMENSIONS



CONNECTABILITY

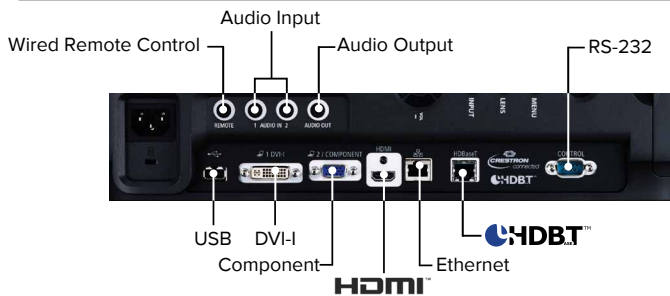

WHAT'S IN THE BOX

- Projector
- Lens Cap
- Power Cord
- VGA to VGA Connection Cable (Mini Dsub15-Mini Dsub15)
- Remote Controller RS-RC04 (includes two AAA batteries)
- Quick Start Guide (Book)
- User's Manual (CD-ROM)
- Warranty Card

OPTIONAL LENSES

| | THROW RATIO | LENS SHIFT | ZOOM RATIO | SCREEN SIZE™ | FOCAL LENGTH | FNUMBER |
|--|---------------|--------------------------|------------|--------------|-----------------|-------------|
| STANDARD ZOOM LENS RS-IL01ST ITEM CODE: 4966B001 | 1.49 – 2.24:1 | V: 15% – 55% H: ± 10% | 1.5x | 40"–600" | 23.0 - 34.5mm | 1.89 - 2.65 |
| LONG FOCUS ZOOM LENS RS-IL02LZ ITEM CODE: 4967B001 | 2.19 – 3.74:1 | V: 15% – 55% H: ± 10% | 1.7x | 40"–600" | 34.0 - 57.7mm | 1.99 - 2.83 |
| ULTRA WIDE ANGLE LENS RS-IL03WF ITEM CODE: 4968B001 | 0.80:1 | V: 5% – 5% H: ± 2% | Fixed | 40"–300" | 12.8mm | 2.0 |
| ULTRA LONG FOCUS ZOOM LENS RS-IL04UL ITEM CODE: 6064B001 | 3.55 - 6.94:1 | V: 15% – 55% H: ± 10% | 1.95x | 60"–600" | 53.6 - 105.6mm | 2.34 - 2.81 |
| SHORT FOCUS ZOOM LENS RS-IL05WZ ITEM CODE: 8168B001 | 1.00 - 1.50:1 | V: 15% – 55% H: ± 10% | 1.5x | 40"–600" | 15.56 - 23.34mm | 2.09 - 2.34 |

ACCESSORIES

| | |
|--|----------|
| Replacement Lamp RS-LP09 | 9963B001 |
| Replacement Air Filter RS-FL01 | 4971B001 |
| Remote Controller RS-RC04 | 4970B001 |
| Remote Controller RS-RC05 (With Wired Connection Option) | 5750B001 |
| Ceiling Mount RS-CL11 | 4969B001 |
| Ceiling Extension RS-CL08 (16" – 24") | 3096B001 |
| Ceiling Extension RS-CL09 (24" – 39") | 3097B001 |
| Top Cover RS-TC01 (Dark Grey) | 5471B001 |

*1: When using the optional projection lens RS-IL01ST (projection lens sold separately). *2: When the lamp mode is in Full Power mode/Power Saver mode; value for Power Saver mode is a calculated value thus cannot be guaranteed as specifications. *3: When the Lamp Control function is ON. *4: Varies depending on the combination of the HDBaseT and network settings. *5: This time guarantee a 50% survival rate and a 50% brightness-maintenance rate. This value does not guarantee the service life of the lamp. *6: Only available on WUX6010 D model.

© 2016 Canon Australia. All rights reserved. Not responsible for typographical errors. Specifications subject to change without notice. Products not shown to scale. Certain images and effects are simulated. Canon and XEED are registered trademarks of Canon Inc. in Australia and may also be trademarks or registered trademarks in other countries. DICOM is the registered trademark of the National Electrical Manufacturers Association for its standards publications relating to digital communications of medical information. The XEED WUX6010 D is not cleared or approved for medical diagnosis and should not be used for these purposes. HDBaseT(TM) and the HDBaseT Alliance logo are trademarks of the HDBaseT Alliance. All other products and brand names may be registered trademarks, trademarks or service marks of their respective owners in the Australia and/or other countries.

Canon

canon.com.au/business
1800 444 199

No one does it like you